11*i* July 2003

Module 4

Chapter 8

AUTORIF Extract

Chapter Overview

Introduction

This chapter explains how to create an AUTORIF Extract File. The extracted data is uploaded into AUTORIF to produce a Retention Register for Reduction-in-Force (RIF) purposes. AUTORIF is a separate application and operates externally using data extracted from the DCPDS.

Chapter Contents

Topic	Page
Before you Begin	1
Creating an AUTORIF Extract File	2

Before you Begin

- Components will determine who has access to the AUTORIF Extract File.
- Normally, employee records will be reviewed and corrected prior to running the extract file.
- If an employee record is updated or corrected after the extract is produced, it may be necessary to create a new extract file prior to running AUTORIF (depending on your RIF cut-off date).
- You can change the data within the extract file, but the data is not changed in the DCPDS database. To change the database, you must go into the system to make the change and then rerun the extract file.


11*i* July 2003

Creating an AUTORIF Extract File

Purpose

This section guides you through the steps for creating an AUTORIF Extract File.

Creating an AUTORIF Extract File

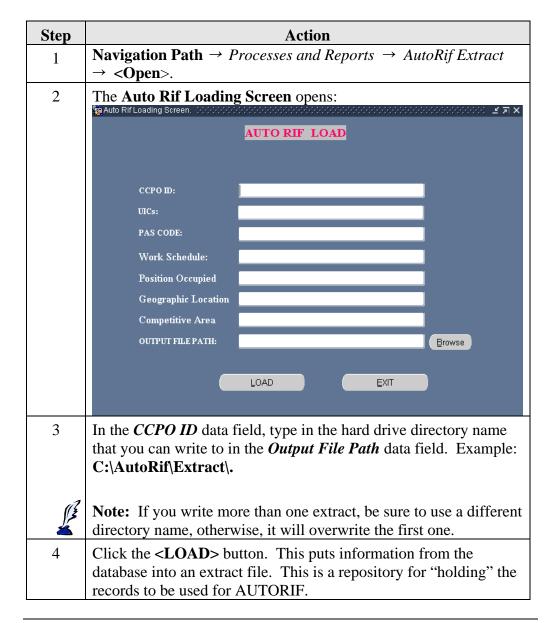

Continued on next page

July 2003

Creating an AUTORIF Extract File, Continued

Creating an AUTORIF Extract File (continued)

Step	Action
5	A message box displays stating the process is done.
	Click the <ok></ok> button.
6	The AUTORIF Loading Screen displays with the Message Line indicating "Process Done".
	Click the EXIT > button.

11*i* July 2003

THIS PAGE LEFT INTENTIONALLY BLANK